


DCM1604A

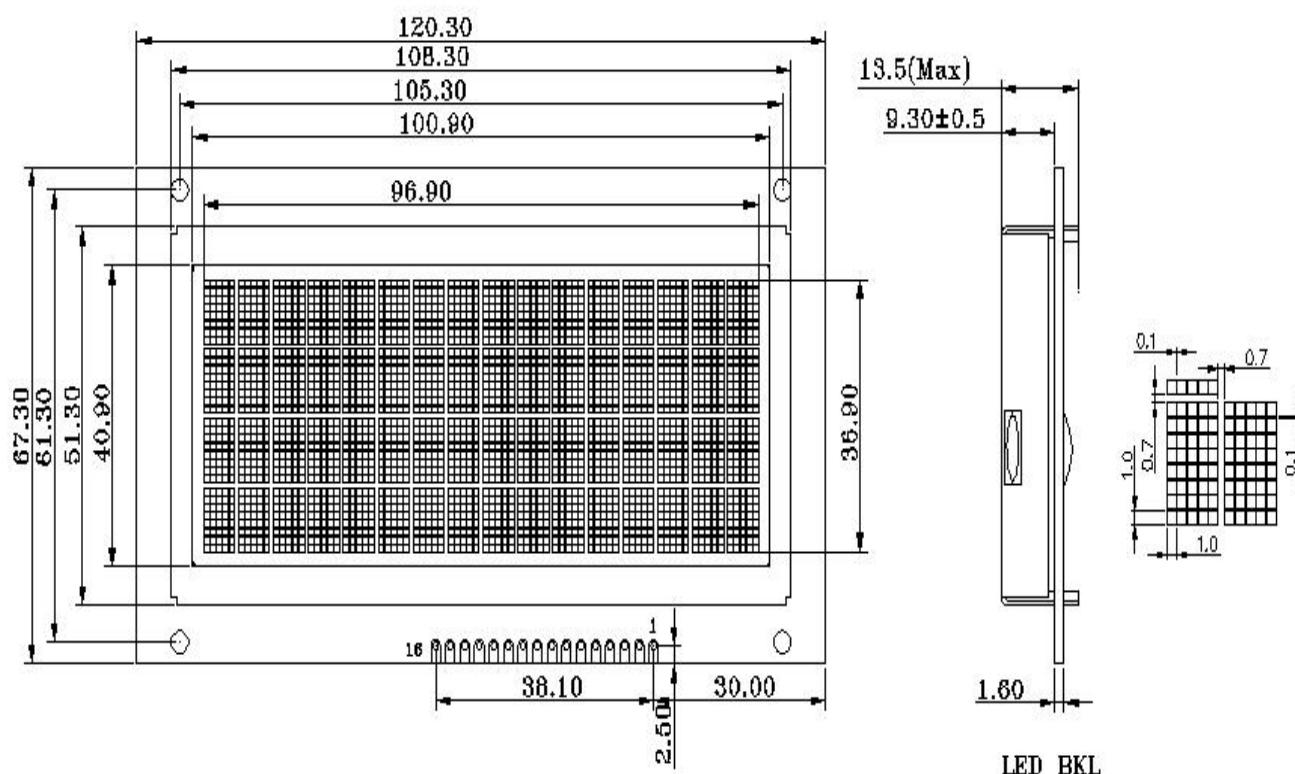

FEATURE

1. 5X8 dots with cursor
2. Built- in controller (SPLC780D or Equivalent)
3. +5V power supply (Also available for +3.0V)
4. 1/16 duty cycle
5. BKL to be driven by pin1,pin2,or pin15,pin16 or A,K
6. N.V. Optional

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN	MAX	UNIT
POWER SUPPLY (LOGIC)	Vdd	-0.3	7.0	V
POWER SUPPLY (LCD)	V0	Vdd -13.5	Vdd +0.3	V
INPUT VOLTAGE	Vin	-0.3	Vdd +0.3	V

PIN ASSIGNMENT

PIN	SYMBOL	FUNCTION
1	Vss	GND
2	Vdd	Power Supply
3	V0	Contrast Adjust
4	RS	Register Select Signal
5	R/W	Data Read/Write
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line
15(A)	LED+	Power supply for BKL(+)
16(K)	LED-	Power supply for BKL(-)

MECHANICAL SPECIFICATIONS

CHARACTER NUMBER	16W X 4H	—
OVERALL SIZE	120.00W X 67.30H	mm
VIEWING AREA	100.90W X 40.90H	mm
HOLE - HOLE	105.30W X 61.30H	mm
CHARACTER PITCH	6.1W X 9.40H	mm
DOT SIZE	1.0W X 0.00H	mm
DOT PITCH	1.0W X 0.00H	mm

ELECTRONICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	STANDARD			UNIT
			MIN	TYP	MAX	
<i>Input voltage</i>	Vdd	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	3.3	V
<i>Supply current</i>	Idd	Vdd=5V	---	3.0	5.0	mA
<i>Recommended LCD driving voltage for normal temp version module</i>	Vdd-V0	0 °C	4.7	5.0	5.5	V
		25 °C	4.3	4.5	4.7	
		50 °C	4.1	4.3	4.5	
LED forward voltage	V _F	25 °C	---	4.2	4.6	V
LED forward current	I _F	25 °C	---	220	---	mA

DISPLAY CHARACTER ADDRESS CODE

Display position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DDRAM address	00	01	02	--	--	--	--	--								0F
DDRAM address	40	41	42	--	--	--	--	--								4F
DDRAM address	10	11	12	--	--	--	--	--								1F
DDRAM address	50	51	52	--	--	--	--	--								5F