



DCM2004C

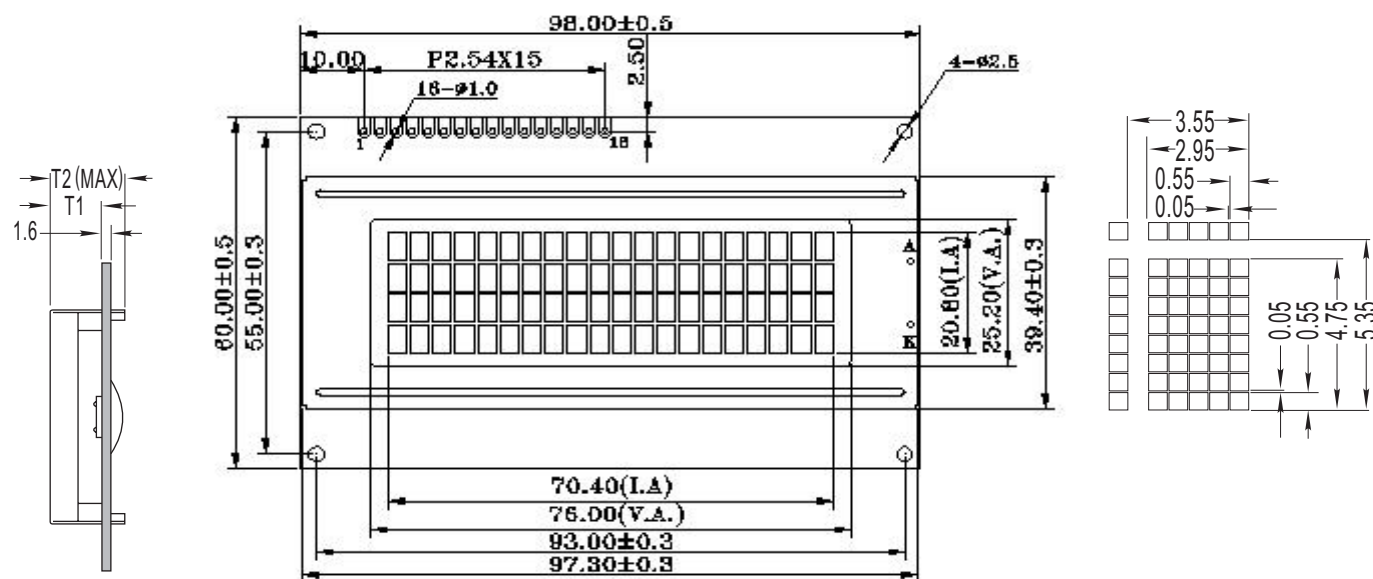

ITEM	T1	T2
LED backlight	9.4	14.0
EL / without backlight	4.6	9.5

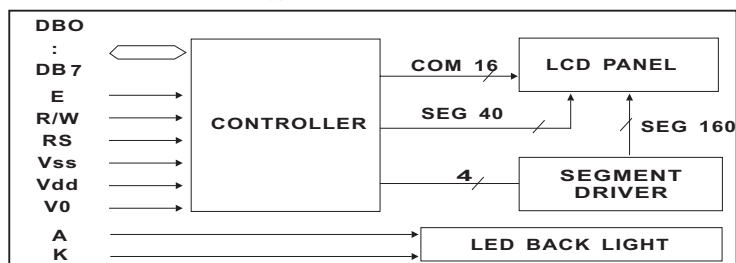

FEATURE

1. 5X8 dots with cursor
2. Built- in controller (ST7066U or Equivalent)
3. +5V power supply (Also available for +3.0V)
4. 1/16 duty cycle
5. BKL to be driven by pin1,pin2,or pin15,pin16
6. N.V. Optional

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN	MAX	UNIT
POWER SUPPLY (LOGIC)	Vdd	-0.3	7.0	V
POWER SUPPLY (LCD)	V0	Vdd -13.5	Vdd +0.3	V
INPUT VOLTAGE	Vin	-0.3	Vdd +0.3	V

PIN ASSIGNMENT

PIN	SYMBOL	FUNCTION
1	V _{SS}	GND
2	V _{DD}	Power Supply
3	V ₀	Contrast Adjust
4	RS	Register Select Signal
5	R/W	Data Read/Write
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line
15	LED+	Power supply for BKL(+)
16	LED-	Power supply for BKL(-)

MECHANICAL SPECIFICATIONS

CHARACTER NUMBER	20W X 4H	—
OVERALL SIZE	98.00W X 60.00H	mm
VIEWING AREA	76.00W X 26.00H	mm
HOLE - HOLE	93.00W X 55.00H	mm
CHARACTER SIZE	2.95W X 4.75H	mm
CHARACTER PITCH	0.60W X 0.60H	mm
DOT SIZE	0.55W X 0.55H	mm
DOT PITCH	0.05W X 0.05H	mm

ELECTRONICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	STANDARD			UNIT
			MIN	TYP	MAX	
Input voltage	Vdd	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	3.3	V
Supply current	Idd	Vdd=5V	---	1.5	3.5	mA
Recommended LCD driving voltage for normal temp version module	Vdd-V0	0 °C	4.7	5.0	5.5	V
		25 °C	4.3	4.5	4.7	
		50 °C	4.1	4.3	4.5	
LED forward voltage	V _F	25 °C	---	4.2	4.6	V
LED forward current	I _F	25 °C	---	150	---	mA

DISPLAY CHARACTER ADDRESS CODE

<i>Display position</i>	1	2	3	4	--	--	--	--	--	19	20
<i>DDRAM address</i>	00	01	02	--	--	--	--	--	--	12	13
<i>DDRAM address</i>	40	41	42	--	--	--	--	--	--	52	53
<i>DDRAM address</i>	14	15	16	--	--	--	--	--	--	26	27
<i>DDRAM address</i>	54	55	56	--	--	--	--	--	--	66	67